INSTRUCTION

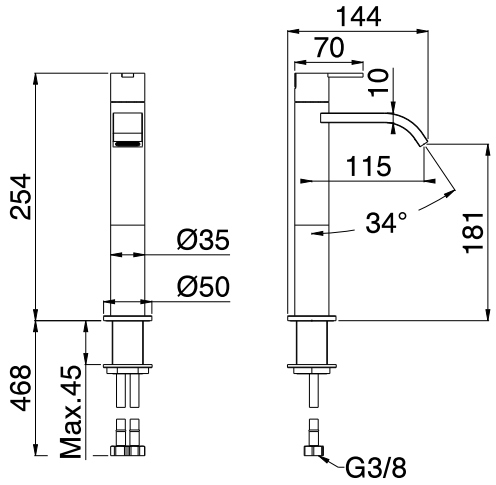

INSTALLATION

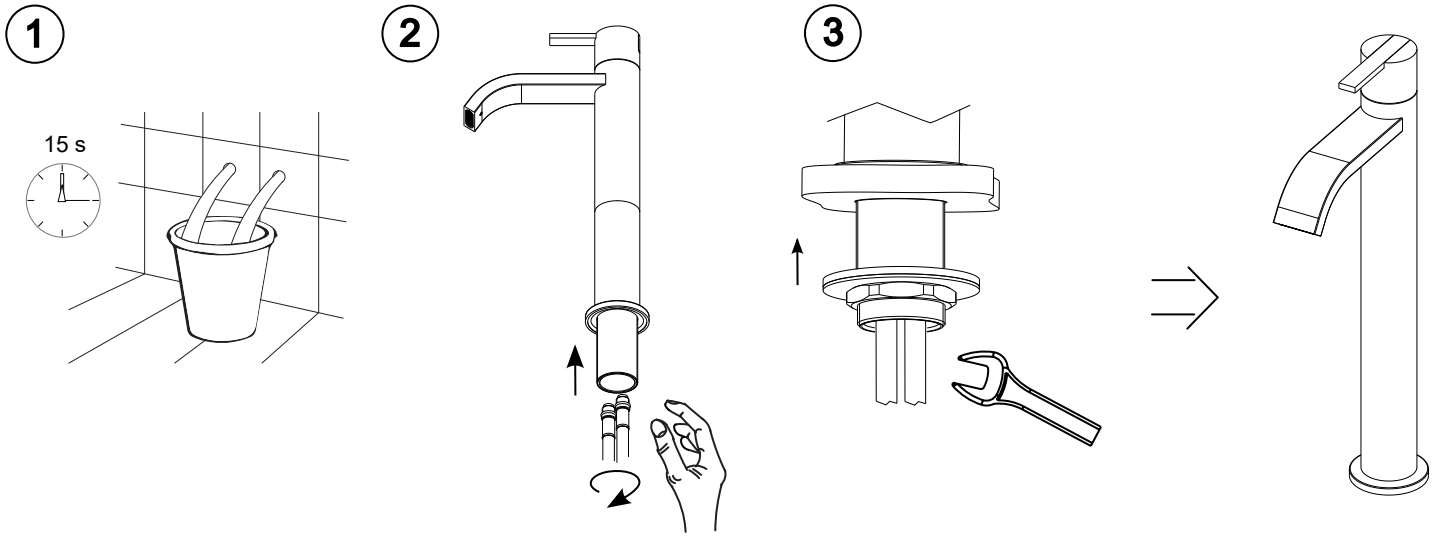

MAINTENANCE

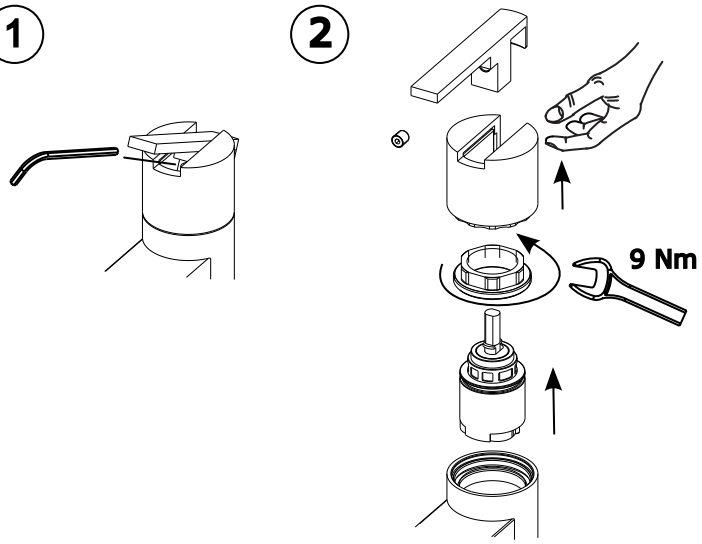

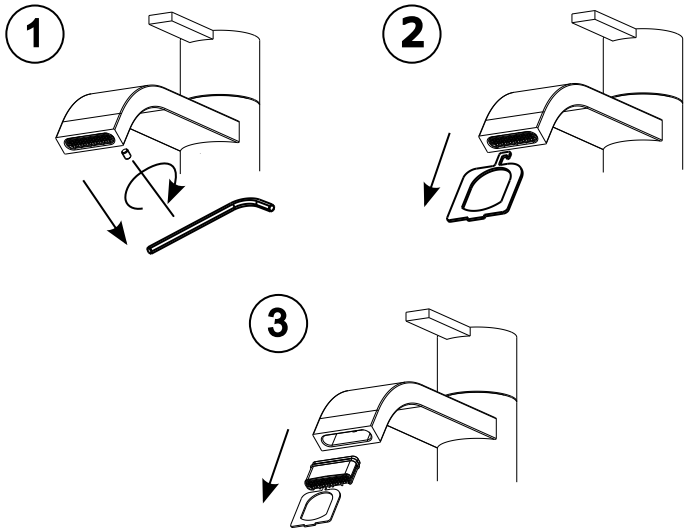

OPERATING CONDITIONS

Cold water temperature	5-25 °C	41-77°F
Hot water temperature	55-65 °C	13-149°F
Suggessted hot water temperature	60 °C	140°F
Permissibile dynamic hydraulic pressure	1-5 Bar	15-73 psi
Suggested dynamic hydraulic pressure	3 Bar	45 psi

IST400734-Rev.00